


Manhole Hydrostatic Testing

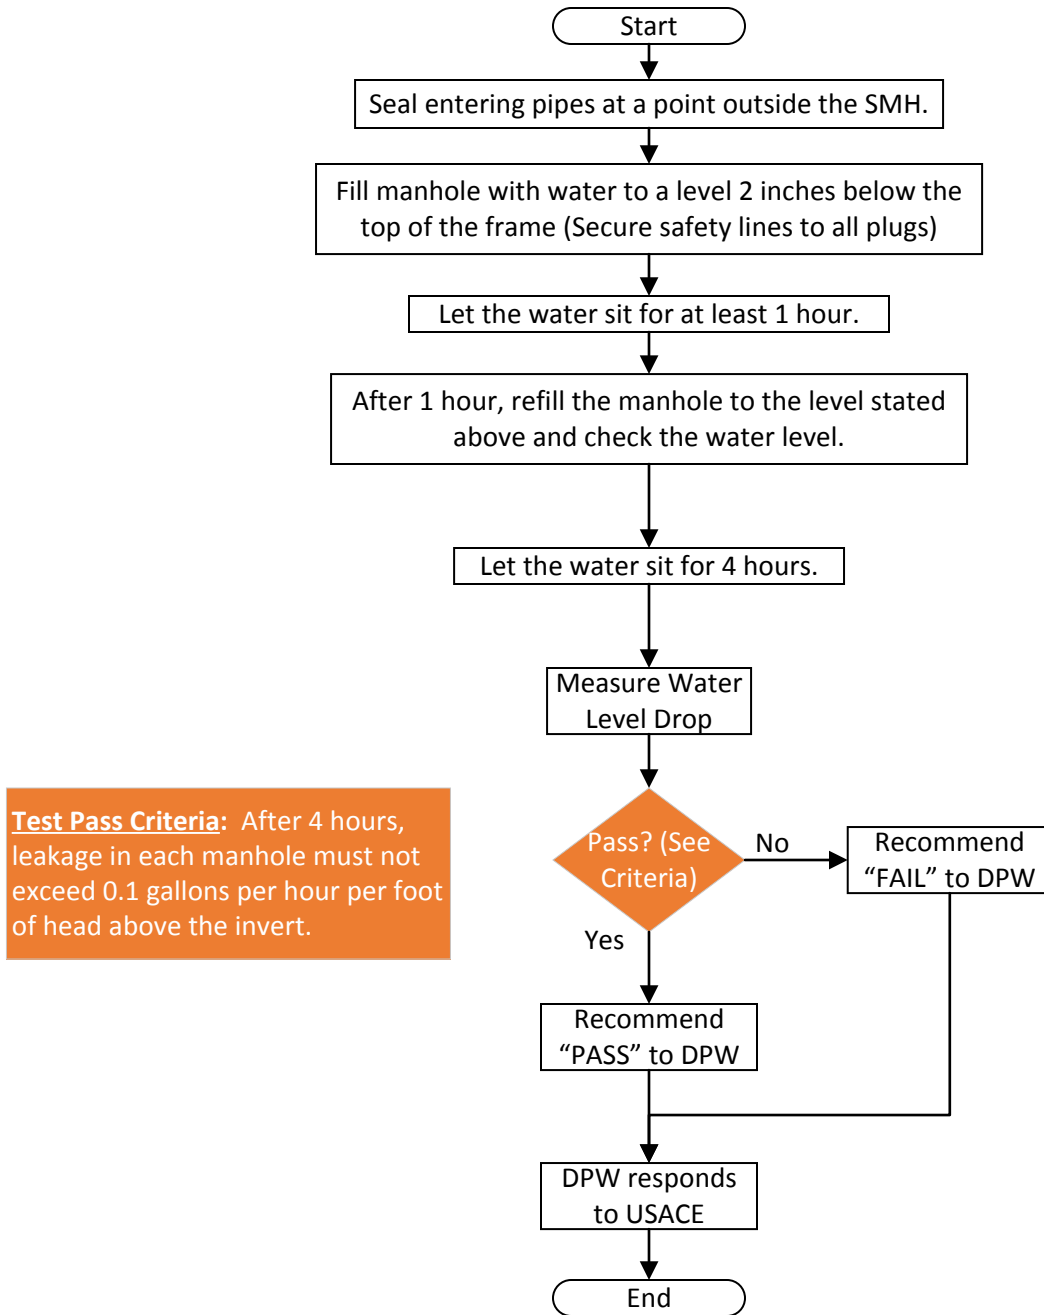

Notes:

1. The determination of "PASS" or "FAIL" will not be made on the field on the test day. Documentation will be prepared and formal written response from DPW will be provided to USACE.
2. All cracks or leaks must be repaired by the Contractor, with non-shrink grout, prior to hydrostatic testing, to the satisfaction of DPW as recommended to DPW by the Collection System Superintendent or their designated representative.
3. Testing shall be done after completion of the manhole barrels, backfilling, frame installation, and interior coating.